



□ ヒーティングユニット構造図

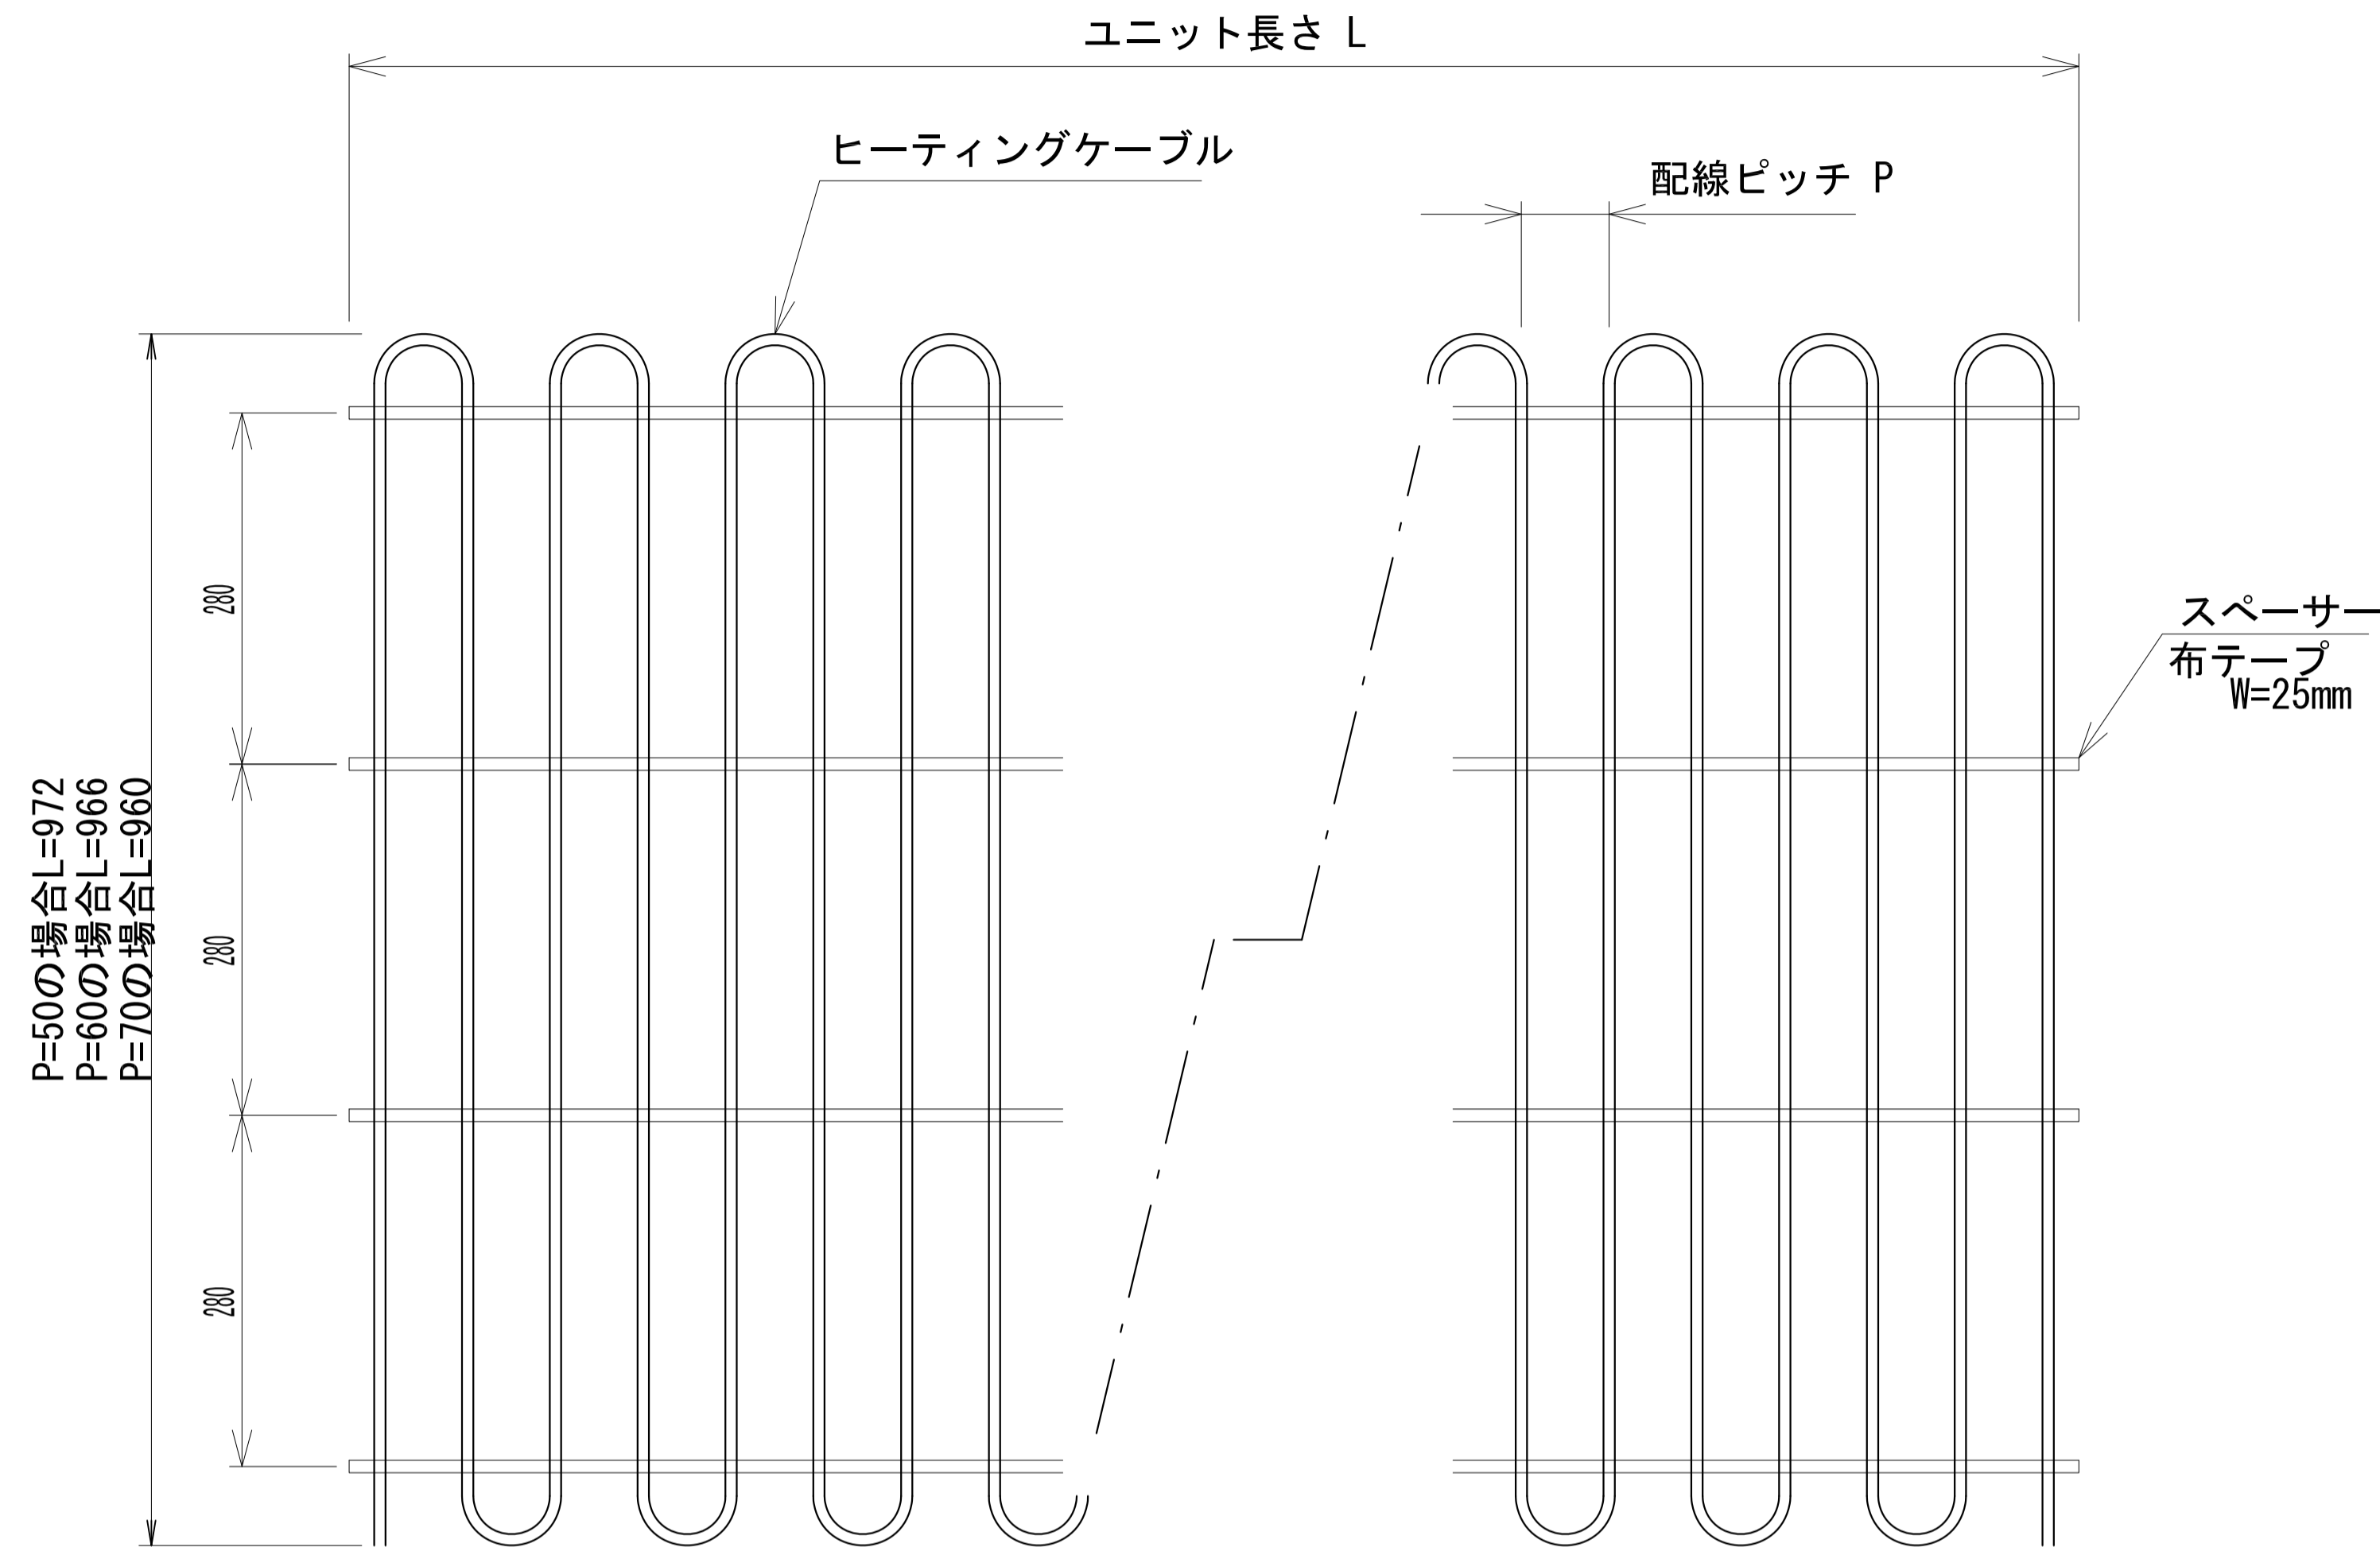

□ ヒーティングユニット断面図

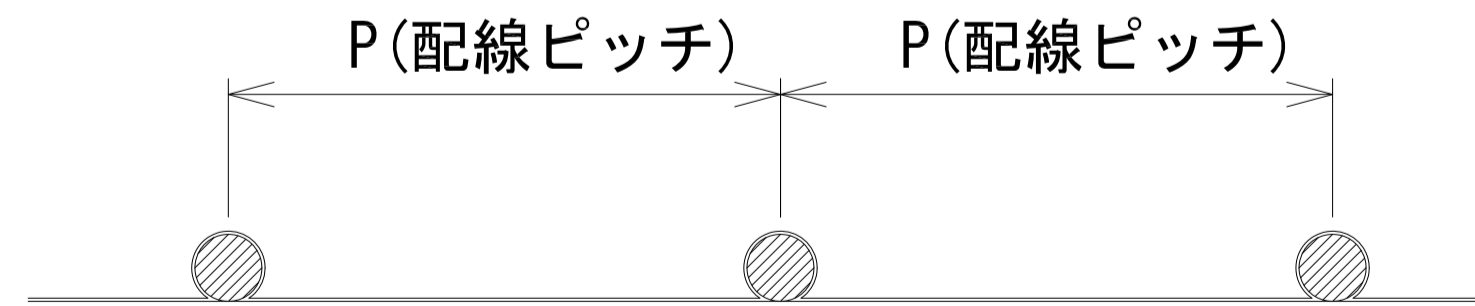

□ 強化型ヒーティングユニット仕様

型番	設計発熱量 (w/m ²)	ユニット公称面積 W(m) × L(m)=S(m ²)	定格電力 (kw)	ケーブル長さ (m)	ユニット抵抗値 (Ω)	配線ピッチ (mm)
SHC-1900M5	200	1.0 × 2.3 = 2.3	0.46	45.0	87.26	50
SHC-360M5		1.0 × 5.3 = 5.3	1.06	105.0	37.80	
SHC-191M5		1.0 × 7.2 = 7.2	1.45	144.0	27.50	
SHC-110M5		1.0 × 9.5 = 9.5	1.91	190.0	20.90	
SHC-73M5		1.0 × 11.7 = 11.7	2.34	234.1	17.09	
SHC-37M5	1.0 × 16.4 = 16.4	3.29	328.0	12.14		
SHC-1900H5	250	1.0 × 2.0 = 2.0	0.52	40.0	77.56	
SHC-360H5		1.0 × 4.7 = 4.7	1.18	94.0	33.84	
SHC-191H5		1.0 × 6.5 = 6.5	1.62	129.0	24.64	
SHC-110H5		1.0 × 8.5 = 8.5	2.14	170.0	18.70	
SHC-73H5		1.0 × 10.8 = 10.8	2.62	209.4	15.28	
SHC-37H5	1.0 × 14.7 = 14.7	3.68	294.0	10.88		
SHC-1900U5	300	1.0 × 1.9 = 1.9	0.56	37.0	71.74	
SHC-360U5		1.0 × 4.3 = 4.3	1.29	86.0	30.96	
SHC-191U5		1.0 × 5.9 = 5.9	1.77	118.0	22.54	
SHC-110U5		1.0 × 7.8 = 7.8	2.35	155.0	17.05	
SHC-73U5		1.0 × 9.6 = 9.6	2.87	191.1	13.95	
SHC-37U5	1.0 × 13.4 = 13.4	4.03	268.0	9.92		
SHC-1900M6	200	1.0 × 2.5 = 2.5	0.50	41.0	79.50	
SHC-360M6		1.0 × 5.8 = 5.8	1.16	96.0	34.56	
SHC-191M6		1.0 × 7.9 = 7.9	1.59	132.0	25.21	
SHC-110M6		1.0 × 10.4 = 10.4	2.09	174.0	19.14	
SHC-73M6		1.0 × 12.8 = 12.8	2.56	213.7	15.60	
SHC-37M6	1.0 × 18.0 = 18.0	3.60	300.0	11.10		
SHC-1900H6	250	1.0 × 2.2 = 2.2	0.56	37.0	71.74	
SHC-360H6		1.0 × 5.2 = 5.2	1.29	86.0	30.96	
SHC-191H6		1.0 × 7.1 = 7.1	1.77	118.0	22.54	
SHC-110H6		1.0 × 9.4 = 9.4	2.33	156.0	17.16	
SHC-73H6		1.0 × 11.5 = 11.5	2.87	191.1	13.95	
SHC-37H6	1.0 × 16.1 = 16.1	4.03	268.0	9.92		
SHC-1900U6	300	1.0 × 2.0 = 2.0	0.61	34.0	65.93	
SHC-360U6		1.0 × 4.7 = 4.7	1.41	79.0	28.44	
SHC-191U6		1.0 × 6.5 = 6.5	1.94	108.0	20.63	
SHC-110U6		1.0 × 8.5 = 8.5	2.56	142.0	15.62	
SHC-73U6		1.0 × 10.5 = 10.5	3.14	174.5	12.74	
SHC-37U6	1.0 × 14.7 = 14.7	4.41	245.0	9.07		
SHC-1900M7	200	1.0 × 2.7 = 2.7	0.54	38.0	73.68	
SHC-360M7		1.0 × 6.2 = 6.2	1.25	89.0	32.04	
SHC-191M7		1.0 × 8.5 = 8.5	1.72	122.0	23.30	
SHC-110M7		1.0 × 11.3 = 11.3	2.26	161.0	17.71	
SHC-73M7		1.0 × 13.9 = 13.9	2.77	197.8	14.44	
SHC-37M7	1.0 × 19.5 = 19.5	3.89	278.0	10.29		
SHC-1900H7	250	1.0 × 2.4 = 2.4	0.61	34.0	65.93	
SHC-360H7		1.0 × 5.6 = 5.6	1.39	80.0	28.80	
SHC-191H7		1.0 × 7.6 = 7.6	1.92	109.0	20.82	
SHC-110H7		1.0 × 10.1 = 10.1	2.53	144.0	15.84	
SHC-73H7		1.0 × 12.4 = 12.4	3.10	176.9	12.92	
SHC-37H7	1.0 × 17.4 = 17.4	4.34	249.0	9.21		
SHC-1900U7	300	1.0 × 2.2 = 2.2	0.67	31.0	60.11	
SHC-360U7		1.0 × 5.1 = 5.1	1.52	73.0	26.28	
SHC-191U7		1.0 × 7.0 = 7.0	2.09	100.0	19.10	
SHC-110U7		1.0 × 9.2 = 9.2	2.75	132.0	14.52	
SHC-73U7		1.0 × 11.3 = 11.3	3.39	161.5	11.79	
SHC-37U7	1.0 × 15.9 = 15.9	4.76	227.0	8.40		

符号 SIGN	日付 DATE	訂正記事 CORRECTION ARTICLE
① (-)	..	
② (-)	..	
③ (-)	..	
④ (-)	..	

JEMIO CO., LTD.
JEMIO 株式会社ジェミオ

設計 DESIGNED	製図 DRAWN	承認 APPROVED	日付 DATE	縮尺 SCALE	名称 TITLE	図面番号 DRAWING NO	項 PAGE
佐藤	佐藤	佐藤	H24.02.25	:	強化型ヒーターケーブル		
			図法 DRAWING	単位 UNIT			
				mm			